VENABLE, BAETJER, HOWARD & CIVILETTI, LLP

Including professional corporations

1201 New York Avenue, N.W., Suite 1000 Washington, D.C. 20005-3917 (202) 962-4800, Fax (202) 962-8300 www.venable.com 09/462355 RET

Washington, D.C. Maryland Virginja

VENABLE ATTORNEYS AT LAW PE VO

520 Rec'd PCT/PTO 07 JAN 2000

January 7, 2000

Assistant Commissioner for Patents Washington, D.C. 20231

...

Attention: Box PCT - DESIGNATED/ELECTED OFFICE (DO/EO/US)

	ORM PTO-1390 U.S. DEPARTMENT OF COMMERCE PATENT AND TRADEMARK OFFICE REV 5-93)		ATTORNEY'S DOCKET NUMBER 32143-156903		
ú.	TRANSMITTAL LETTER TO THE UNITED STATES		U.S. APPLICATION NO. (If known, see 37 CFR 1.5)		
	DESIGNATED/ELECTED				
11 11 11 11	CONCERNING A FILING				
- 7	INTERNATIONAL APPLICATION NO. PCT/FR98/01437	INTERNATIONAL FILING DATE July 6, 1998	PRIORITY DATES CLAIMED: July 7, 1997		
11.					
, muth 111	TITLE OF INVENTION - see attached pages -				
11.11	PPLICANT(S) FOR DO/EO/US				
- see attached pages -					
2 Charle 2	Applicant herewith submits to the United States	Designated/Elected Office (DO/EO/US) the following items	and other information:		
4.5	1. X This is a FIRST submission of items concerning a filing under 35 U.S.C. 371.				
	-	s is a SECOND or SUBSEQUENT submission of items concerning a filing under 35 U.S.C. 371.			
		al examination procedures (35 U.S.C. 371(f)) at any time rath the applicable time limit set in 35 U.S.C. 371(b) and PCT Arti			

- See attached pages for additional data -

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

Application Branch

In re Patent Application of

Applicant: Pierre PICCALUGA

International Appln. No.: PCT/FR98/01437

Attorney Dkt. No. 32143-156903

Filed Concurrently herewith

METHOD AND DEVICE FOR FORMATTING A DIGITAL AUDIO SIGNAL For

TO BE USED FOR SOUND REPRODUCTION

PRELIMINARY AMENDMENT

Assistant Commissioner for Patents Washington, D.C. 20231

Sir:

i,n

14

1,2 11.1

į. ž.

Prior to initial examination of the application, please amend the above-identified application as follows:

IN THE CLAIMS:

Please amend claims 2, 3, 5 and 6 as follows:

line 1, change "characterised by" to --wherein--. Claim 2,

line 1, change "(1) or (2)" to --1--. Claim 3,

line 1, change "(4)" to --4--; and change "characterised in that" to Claim 5,

--wherein--.

line 1, change "claims (4) or (5)" to --claim 4--; and change "characterised Claim 6. by" to --wherein--.

REMARKS

Claims 1-6 are pending in this application. By this Amendment, claims 2, 3, 5 and 6 are amended to either delete multiple dependency and/or further clarify the invention and better correspond the claims to U.S. practice. No new matter is contained in the amendments.

Respectfully submitted,

Jøhn W. Schneller

Registration No. 26,031

Venable, Baetjer and Howard, LLP Post Office Box 34385 Washington, D.C. 20043-9998 (202) 962-4800

Date: January 7, 2000

JWS/ts

#176950

1: 21 1: 25

Į. 2b

10

15

20

25

30

35

428 Rec'd PCT/PTO 0 7 JAN 2000



METHOD AND DEVICE FOR FORMATTING A DIGITAL AUDIO SIGNAL TO BE USED FOR SOUND REPRODUCTION

The principle for feeding electro-acoustic transducers by analog type amplifiers is most commonly used. In fact, the analog movement of the membrane follows sine waves which are curves sampled on recording. The condition for using the electric audio signal is the signal picked up by the micro-computer(s) or derived directly from digital samplers, said signal being smoothed for analog usage. The original digital sound signal used has an intensity and a frequency of 44,100 samples per second according to a well-known model (Fig. 1). The method is the original signal copied and reproduced to obtain a new digital signal for electrically controlling electro-acoustic transducers.

In fact, the pulse response of the electro-acoustic transducers does not conform to the signals emitted by the digital principle. A trailing effect can be observed on the pulses of the membranes which does do not stop when the pulse is finished. The mechanical pulse is extended by the effect of the weight of the membrane for strong pulses. The fine pulses are then masked in this particular condition. It becomes necessary to resolve this drawback by using the present method by imposing at least one additional item of information to control the mechanical effects of the runaway movements of the membranes.

The present method concerns an interface software containing a programmed special compensation control correction adapted for an electro-acoustic transducer.

Two possibilities have been retained to mitigate the mechanical runaway effects, either a multiplication of the digital audio signal with

10

15

20

25

30

35

 smaller but in phase values, or phase inversion pulses. To achieve this, the method concerns using original reference digital sound signals which are copied and reproduced in several copies into a new disposition not modifying the time of the original. Control is precise in order to overcome the mechanical inertia of the membranes. The time parameter is a constant, also when the information doubles or triples the frequency of the signals double and triple proportionally to the multiplication of the reproduced copies. These copies of signals may have values of different intensities with respect to the original and with respect to one another. For example (Fig. 2), a time period is shown on the horizontal line where the values (EC) are present, the signals are copied and the time period does not change. The first copy reproduced has a scale ratio of 1/3 of the original and a second copy has a ratio of 1/1. It is clear that the multiple reproduction of the signals of the new sound signal corresponds to an adjustment of the frequencies of the doubled, tripled or quadrupled signals as many times as the original signal is multiplied. It is not echo which extends the note, but a method compensating the inertia of the membranes adapted to the dynamic stresses which by the weight dissociates the current voltage parameters of the instant. A smoothing of the newly formatted signal is provided to obtain an analog signal.

This digital or analog audio signal can be directly applied to the terminals of at least one electro-acoustic transducer.

This multiple reproduction of the original recorded signal may firstly have its intensity value different and secondly a phase shift, a sliding able to go up to its total inverse phase value with respect to the original signal. This method is characterised by the multiple reproduction of the originals (Fig. 3), known as the "original signal" with a given time (TP), into a new formatted signal 4 times the original frequency whose two copies are in inverse phase and with ½ intensity value. These phase inversion signals smooth-plane the membrane whose inertia would push it away too far and it would be late for the next pulse which creates current voltage dissociation.

The method can copy the original message and reproduce it according to all the variants of the combinations described identically for each original signal per order cyclic sequence reproduced in the intensity and phase scale ratio T1, T2, T3, T4 (Fig. 4).

10

15

20

25

30

35

The first first that the first that

The method has a device for formatting the audio signal for an electro-acoustic transducer, characterised by an original digital signal referential recorded on a medium or directly copied by reproduction of the original according to the method determining an interface software between an original digital signal and a newly formatted digital signal for an electric control of the best possible adapted mechanical movements. The new signals are at least two copies of the original signal. The copies of the signals may be in-phase or total in-phase inversion signals with respect to the original. The intensities of each signal can be a fraction of the intensity value of the original.

A device can be embodied by an expert in this field as an example (Fig. 4) in a sound reproduction chain having a radio receiver, a laser disk reader (CD) and a formatting system according to the method integrated in a digital amplifier (AN) for feeding the acoustic speakers (E). The amplifier receives the digital message via the optical beam (FO) and decodes the digital audio signal via the decoder (D) which shall establish the original signal. This signal is transferred to four samplers (T1, T2, T3, T4) managed by a common clock. A micro-computer (HC) fitted with a relay for regular and cyclic scanning programmes the activities of the four samplers able to be adjusted with respect to the values of the decoder (D). Each sampler, by copying the reproduced original signal, uses two programming potentiometers, namely one to position the scale ratio of the intensities, and the other for the phase of the intensities between the phase synchronicity and the phase inversion sliding with respect to the original. In this case, the sampler (T1) is identically adjusted as the sampler of the decoder of the original signal.

The sampler (T2) is adjusted to the inverse phase value of (T1) with the same intensity value. The sampler (T3) is adjusted to $1/3^{rd}$ of the intensity of T1 and 1/2 the intensity of (T1). The sampler (T4) is in phase with (T1) and $\frac{1}{2}$ of (T1). The formatted signal (F) is amplified by the amplifier (A) whose power in adjusted by the potentiometer (V) determining the sensitivity of the decoder.

The digital audio signal formatting devices according to the present method need a frequency 4 times greater for the medium and high notes and 3 times greater for the low notes. The sound reproduction system (Fig. 5), made up of a micro-computer, a digital audio cassette

10

15

20

Land Cartin Living when given given for more given given strong giving in the land to the

4

recorder/reader and a laser disk reader and possibly other items are connected to the power digital amplifier with four independent outputs having 2 low notes (B) and 2 satellites (S). The amplifier requires decoders (RA) which establish the original signal. An electronic clock in an electronic chip (HE) co-ordinates the regular and cyclic programmed order of action of four samplers which determine the profile of the new sound message. The channels respectively receive three samplers coupled for the low notes (EGD, EGG) all phase-adjusted in a ratio of 1/3rd on reduction of the first with respect to the second and 1/3rd of the second with respect to the third. The signal newly formatted by the computer (X) is amplified by the amplifier (AX) so as to feed the low note boxes. The samplers (ESG, ESD) with four levels feed the satellites by means of the amplifiers (AX). The frequencies (ESG, ESD) have four times the speed of (RA), whereas those of (EGG, EGD) have three times the speed of (RA). A smoothing modem is provided for analog reading, this device not being restrictive and merely an example. All the electronic means with a semiconductors active or passive component or all the forms of microcomputers and integrated circuits or future products in the field of connections and active electronics can be used to embody these devices.

The present method and device adapts the digital sound signal into a digital signal for controlling all the electro-dynamic transducers. This correction principle can be used in audio and audiovisual applications.

10

15


20


25


5

CLAIMS

- 1. Method for formatting a digital audio signal for controlling at least one electro-acoustic transducer from an original digital signal of an electric sound signal modified into a digital sound signal by copying the original signal at a higher frequency proportional to the copies whose reproduced copies have intensity values different from the original so as to control the mechanical runaway effects of electro-acoustic transducers.
- 2. Method according to claim 1, characterised by the phase inversion of the copies which have intensities possibly ranging up to the total phase inversion with respect to the original signal.
- 3. Method according to claim (1) or (2) where the newly-formatted digital signal is smoothed for use as an analog signal.
- 4. Device for formatting a digital control signal applied directly to the terminals of at least one electro-acoustic transducer from an original signal of a digital recorder or a digital sound medium into a new digital sound audio signal whose original signals are copied and reproduced at higher frequencies created by specific samplers for each of the copied signals, characterised in that the phase and intensity values of the new signals are adjustable by two distinct potentiometers and whose order of action of the samplers (T1, T2, T3, T4) is cyclic and regular and is ensured by an electronic clock (HE).
- 5. Device according to claim (4), characterised in that the frequency of the samplers is proportional to the reproduced number of copies, namely the doubled frequency if there are two copies and quadrupled if there are four copies of the original signal.
- 6. Device according to claims (4) or (5), characterised by the addition of a smoothing modem for an analog function.

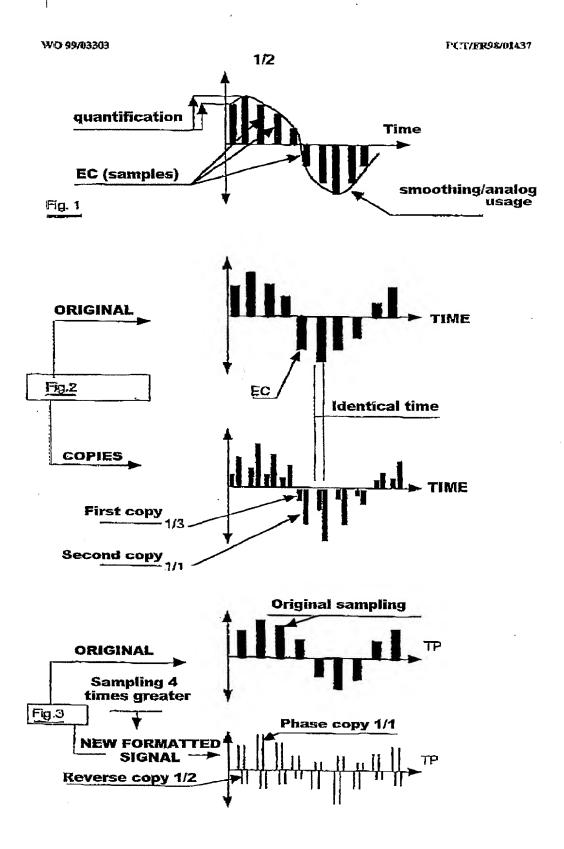

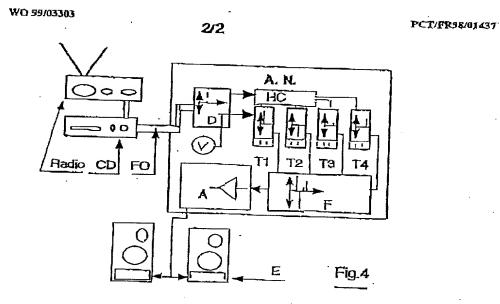

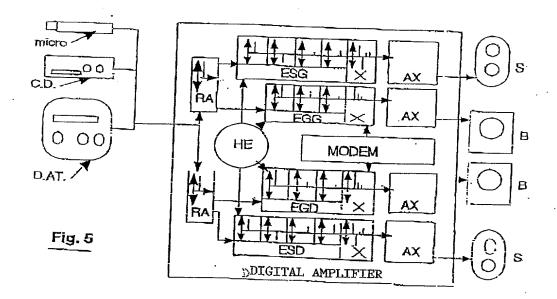

Printed from Mimosa

VENABLE, BAETJER, HOWARD & CIVILETTI, LLP

Including professional corporations

1201 New York Avenue, N.W., Suite 1000 Washington, D.C. 20005-3917 (202) 962-4800, Fax (202) 962-8300 www.venable.com

416 Rec'd PCT/PTO

WASHINGTON, D.C.
MARY AND AR 2000
VIRGUIAMAR 2000

OFFICES IN

VENABLE

March 10, 2000

Attorney Docket No.: 32143-156903

Assistant Commissioner for Patents
Sox PCT
Washington, D.C. 20231

Re:

International Application No.

U.S. Serial No.

09/462355

International Filing Date:

July 6, 1998

PCT/FR98/01437

Priority Claimed:

July 7, 1997

Inventor:

Pierre PICCALUGA

Title: METHOD AND DEVICE FOR FORMATTING A DIGITAL AUDIO SIGNAL TO BE USED FOR SOUND REPRODUCTION

Sir:

sā. O Sa

In reply to the Notification of Missing Requirements dated February 29, 2000,

submitted herewith are the following:

4257 A24000A

- A copy of the Notification of Missing Requirements;
- A Declaration/Power of Attorney; and
- A check in the amount of \$65.00 for small entity fees for delayed

declaration. Applicant submitted a Statement Claiming Small Entity

Status Declaration in the U.S. Patent and Trademark Office on

March 1, 2000.

The Examiner is respectfully requested to acknowledge that all of the requirements of 35 U.S.C. §371 have been met.

03/15/2000 UNALKER 00000001 09462355

01 FC:254

65.00 OF

Please charge any fee deficiency or credit any overpayment to Deposit Account No.

Respectfully submitted,

ohn W. Schneller

Registration No. 26,031

Venable, Baetjer and Howard, LLP

Post Office Box 34385

Washington, D.C. 20043-9998

(202) 962-4800

#187397

22-0261.

Pg: 16 2010 2003 #3

Docket No.: 32143-156903

DECLARATION AND POWER OF ATTORNEY

As a below named inventor, I declare that:

My residence, post office address, and citizenship are as stated below next to my name. I believe that I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter that is claimed and for which a patent is sought on the invention entitled

METHOD AND DEVICE FOR FORMATTING A DIGITAL AUDIO SIGNAL TO BE USED FOR SOUND REPRODUCTION

	· · · · · · · · · · · · · · · · · · ·	4,015	A A A A A A A A A A A A A A A A A A A	
said application to be filed [] said application and given Application No.	in the U.S. Patent and III n having been filed in the	ication being executed concuracemark Office; U.S. Patent and Trademark Cortice Trademark Cortice Trademark Control	aty on July 6, 1998	
	and the service of th	ment to the second	10 10 10 10 10 10 10 10 10 10 10 10 10 1	
amendment referred to above.			ecification, including the claims, as amended by any	
I acknowledge that duty to dis- with 37 CFR §1.56.	close information of William 1 8	III SASIC SHU AUCH IS HISICHE M.	TRE EXAMINATION OF THE PARTY OF	
WIE 37 CFK 91-20-	i i i i i i i i i i i i i i i i i i i	- 1989	-28. 38. 49. 30. 38. 38. 38. 38. 38. 38. 38. 38. 38. 38	
identified below, by checking filing date before that of the ap Prior Foreign Application	the space, any forcign applica- plication on which priority is (s)	ation for patent or thremon's cerum	ne United States of America, listed below and have also leate, or of any PCT International application having a Priority Claimed	
Number	Country	•		
97/08822	France	July 7, 1997	YES	
I hereby claim the benefit under 35 U.S.C. §119(e) of any United States provisional application(s) listed below. Application Serial Number Filing Date				
		·		
United States of America, list States of PCT International information known to me wh application and the national or	ted below and, insofar as the application in the manner price ich is material to the patentabi rPCT International filing date	subject matter of each of the claim covided by the first paragraph of lity as defined in 37 CFR §1.56 wh	c) of any PCT International application designating the s of this application is not disclosed in the prior United 35 U.S.C. §112, I acknowledge the duty to disclose ich became available between the filing date of the prior Status (patented, pending, abandoned)	
Applicat	ion Serial Number	Finng Date	Status (patented, pending,	



Docket No.: 32143-156903

Each undersigned applicant hereby appoints the following attorneys to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith: George H. Spencer (Registration No. 18,038), Robert J. Frank (Registration No. 19,112), Norman N. Kunitz (Registration No. 20,586), Gabor J. Kelemen (Registration No. 21,016), John W. Schneller (Registration No. 26,031), Marina V. Schneller (Registration No. 26,032), Robert Kinberg (Registration No. 26,924), L. Allen Wood, Jr. (Registration No. 28,134), Ashley J. Wells (Registration No. 29,847), James R. Burdett (Registration No. 31,594), Michael A. Gollin (Registration No. 31,957), Catherine M. Voorhees (Registration No. 33,074), Gary L. Shaffer (Registration No. 34,502), Chellis Erika Neal (Registration No. 36,877), G. Abc Zachariah (Registration No. 38,366), Patricia R. Brown (Registration No. 39,012), Julie A. Petruzzelli (Registration No. 40,769), , Catherine A. Ferguson (Registration No. 40,877), Michael P. Leary (Registration No. 41,144), Michael A. Sartori (Registration No. 41,289), Zayd Alathari (Registration No. 42,256) and Fei-Fei Chao (Registration No. 43,538). Direct all correspondence to: VENABLE, BAETJER, HOWARD & CIVILETTI, LLP, Post Office Box 34385, Washington, D.C. 20043-9998 Phone No.: (202) 962-4800 Fax No.: (202) 962-8300 The undersigned hereby authorizes the U.S. attorneys named herein to accept and follow instructions from the undersigned's assignee, if any, and/or, if the undersigned is not a resident of the United States, the undersigned's domestic attorney, patent attorney or patent agent, as to any action to be taken in the Patent and Trademark Office regarding this application without direct communication between the U.S. attorneys and the undersigned. In the event of a change in the persons(s) from whom instructions may be taken, the U.S. attorneys named herein will be so notified by the undersigned.

I declare (or certify, verify, or state) under penalty of perjury under the laws of the United States of America that the foregoing is true and correct.

Full Name of sole or first inventor: Pierre PICCALUGA	
Inventor's signature	Date 02.02, 520000
Residence: 6, rue des Escoffiers, 38 080 L'Isle d'Abeau, FRANCE	FRX
Citizenship: French	
Post Office Address: 6, rue des Escoffiers, 38 080 L'Isle d'Abeau, FRANCE	A STATE OF THE STA